


Rubber Insulated Flex Duct

- VENTUS SKY RUBBER INSULATED 6MM FLEX FLEXIBLE DUCT R1.0

Product Data Sheet

VENTUS SKY RUBBER INSULATED

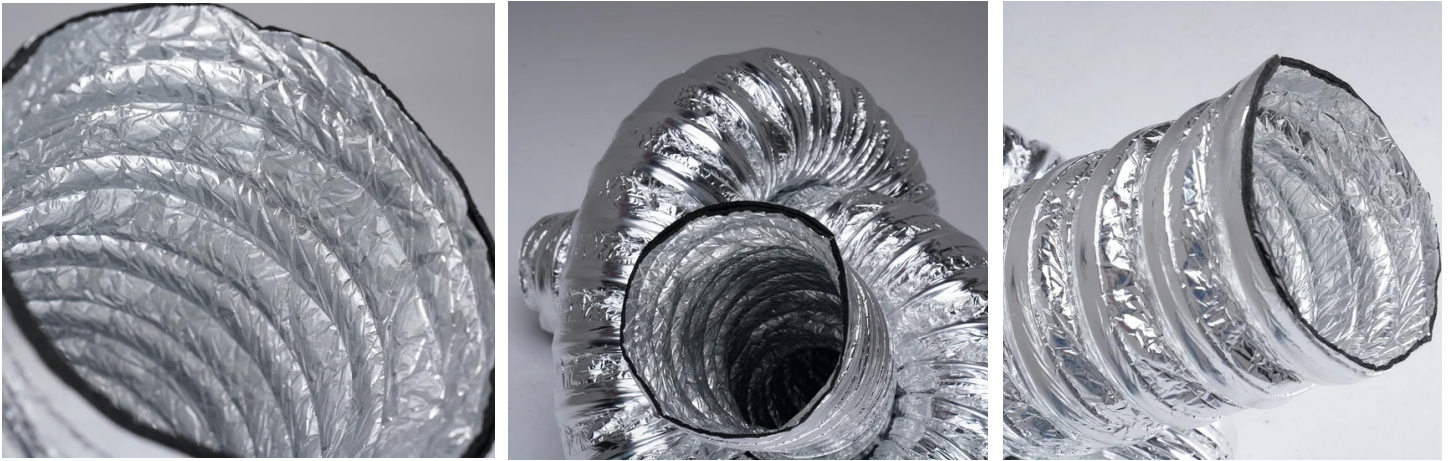

Manufactured from two layers of aluminum and fully laminated with rubber, polyethylene, fiber or glass wool insulation material, this product is self-insulated and is one piece. The fact that the product is fully laminated prevents it from gathering or dusting. It can be customized according to different application areas with its design that allows modification. This product, which is Flameproof (M1) from the factory, withstands a pressure of 5,000 Pa according to TSE standards. The VENTUS product is airtight, resistant to tear and impact.

Model Ref.	6mm FLEX flexible duct R1.0	
Dimensions		
Diameter (inch)	6''	10''
Length (feet)	25ft	
Material	Aluminum + Polyester	
Material - Outer Jacket	Aluminum + Polyester	
Insulation Material	Rubber	
Certificate	Flame Retardant (M1)	
Flame Resistance	-30 °C / 150 °C	
Maximum Air Velocity	30 m/s	
Maximum Operating Pressure	5.000 Pa	